

BASEPLATE DETAILS

- NOTES:**
1. HSS: ASTM A500 GR C, F_y = 50KSI
 2. CHANNEL: ASTM A36, F_y = 36 KSI
 3. PLATES: ASTM A36, F_y = 36KSI
 4. STRUCTURAL BOLTS: ASTM A325N.
 5. PLYWOOD: STRUCTURAL GRADE
 6. SCREW ANCHORS: ZINC PLATED
 7. MAXIMUM 1 PERSON PER PLATFORM MODULE. MAXIMUM WEIGHT PER PERSON INCLUDING TOOLS SHALL BE 310 LBS.
 8. COMMERCIALLY AVAILABLE ADJUSTABLE PLATFORMS MAY BE USED WITH ENGINEER APPROVED MODIFICATIONS.


SCAFFOLDING DETAILS

PTSI MANAGED SERVICES INC
 ANM-1832
 NOT FOR CONSTRUCTION
 2019-09-30
 DESIGNED BY: ROHAN SYBRON
 SK-1 RNO-ATCT

PTSI MANAGED SERVICES INC
 ANM-1832
 NOT FOR CONSTRUCTION
 2019-09-30
 DESIGNED BY: ROHAN SYBRON
 SK-2-RNO-ATCT

ANCHOR BOLT HOLES CAN BE RE-USED
 FOR THE ADJACENT LOCATION OF THE
 PLATFORM, SCREW ANCHORS SHALL BE
 RE-USED ONLY WITH MANUFACTURER'S
 APPROVAL. AFTER COMPLETION OF THE
 PROJECT, FILL ALL HOLES WITH
 NON-SHRINK CONCRETE GROUT.

WALKWAY PLAN @ EL +171'-3"

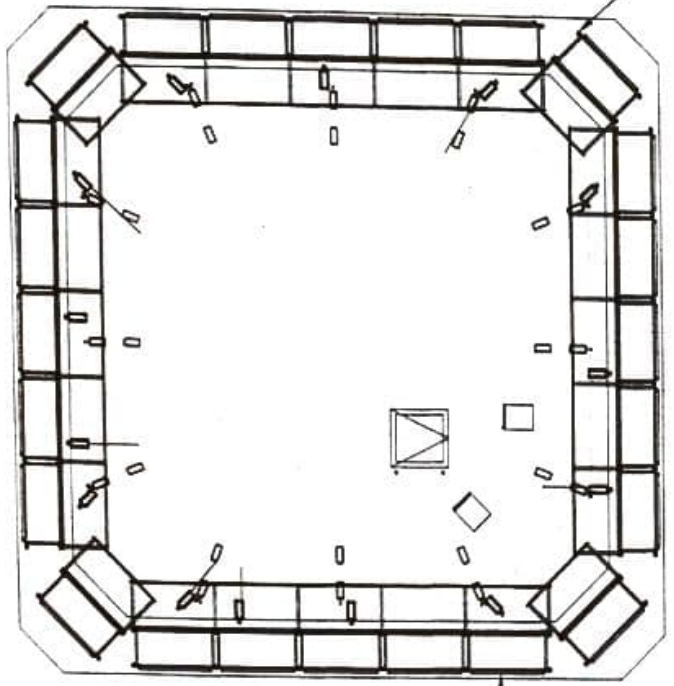

SCAFFOLDING
 MODULE (RELOCATE AS NEEDED, 24 LDC TYP)

